

METERS

pH °C

pH-1 micro



The pH-1 micro is a precise fiber optic pH meter. It is temperature compensated and used with pH microsensors based on a 140 μm optical fiber. A PC is connected to run the user-friendly software. pH-1 micro is additionally equipped with an analogue output and a trigger input.

- For use with pH microsensors
- Simple one-point calibration possible
- Software included

TECHNICAL

Specifications		
pH sensors	HP5	
Temperature sensor	1 x Pt1000 temperature connector (sensor included)	
Temperature performance	0 °C to + 50 °C, resolution ± 0.1 °C, accuracy ± 1.0 °C	
Power supply	18 VDC / 5 W (110 - 240 VAC, 50/60 Hz, adapter included)	
Temperature: operating / storage	0 °C to + 50 °C / - 10 °C to + 60 °C	
Relative humidity	up to 80 % (non condensing)	
Dimensions	210 mm x 120 mm x 50 mm	
Weight	0.65 kg	
Digital interface	RS232 interface (with RJ connector to serial port, cable included)	
External trigger	TTL compatible with galvanic isolation (BNC connector)	
	Dual outputs, 0 - 4.095 mV, resolution 12 bit, accuracy ± 10 mV (BNC connectors)	
	10 mV represent	
Analogue output specifications	pH	0.1 pH
	Temperature	1 °C
	Phase	0.25 °

SENSORS



Profiling pH Microsensor PM-HP5




The pH Profiling Microsensor can be used for all profiling applications in semi-solid substrates, such as sediments, microbial mats or biofilms. The PM-HP5 is the most robust version of PreSens pH Microsensors and has a close-fitting fiber guidance and mechanical interlock for precise vertical localization of the measurement tip. The sensor tip is extendable with a turning mechanism.

- Close-fitting fiber guidance
- Mechanical interlock
- High spatial resolution
- Measurement in smallest volumes
- Profiling of pH gradients

TECHNICAL

Specifications*	
Measurement range	5.5 - 8.5 pH
Resolution	at pH = 7: ± 0.02 pH
Accuracy**	at pH = 7: ± 0.1 pH with sensor calibration
Drift	at pH = 7: < 0.05 pH per day (sampling interval of 1 min.)
Measurement temperature range	from + 5 to + 50 °C
Response time (t_{90})**	at 25 °C: < 30 sec.
Properties*	
Compatibility	Aqueous solutions, ethanol (max. 10 % v/v), methanol (max. 10 % v/v), pH 2 - 10
No cross-sensitivity	Electrical fields, proteins
Cross-sensitivity	Reduced to ionic strength (salinity); a high concentration of small fluorescent molecules in the visible range can interfere
Sterilization procedure	Ethylene oxide (EtO), recalibration recommended
Cleaning procedure	Water, Acrylan, pepsin solution
Calibration	pH sensors are pre-calibrated, recalibration is possible
*provided pH sensors are used without further handling in physiological solutions	
**calibration and following measurements in the same conditions / system; equilibrated sensor kept in well stirred solution at + 37 °C	

ACCESSORIES

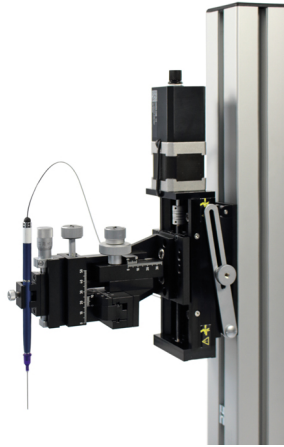

Automated Micromanipulator AM

The Automated Micromanipulator is specifically designed for profiling applications with the PreSens profiling microsensor (PM), and can also be operated with needle-type housed (NTH) and implantable (IMP) microsensors, as well as dipping probes (DP). With this system the microsensor can be moved vibration-free with μm reading accuracy and it enables exact localization of the sensor in the sample. Automated profiling can be performed along one dimension in μm resolution. The micromanipulator additionally comprises a tilting platform so the microsensor can be adjusted at an angled position. The associated user-friendly, and database-supported software PreSens Profiling Studio allows easy control of the AM and the respective oxygen, pH or CO_2 meter via USB. The software offers multiple features from clear data organization and export, easy creation of profiling templates, to analysis functions.

- Fully automated system
- No electrical interference due to optical measurement
- Adaptable to any sample
- Software PreSens Profiling Studio included
- Easy USB connection
- Individual profile and step-zone definition
- Compact, with additional manual motor control

TECHNICAL

Specifications	
Compatibility	Profiling (PM), Needle-type Housed (NTH) and Implantable (IMP) oxygen, pH & CO ₂ microsensors
Dimensions	275 mm x 95 mm x 220 mm
Weight	2 kg
Travel range automated	x-axis: 75 mm
Travel range manual	x-axis: 37 mm, fine drive: 10 mm y-axis: 20 mm z-axis: 25 mm
Resolution	1 µm
Repeatability	< 2.5 µm
Mounting adapter	M6 screws, 13 mm length
Power supply	100 - 240 VAC, 50 - 60 Hz Use supplied power adapter (15 VDC, 2.1 mm center positive plug) only.
Digital interface	USB interface (cable included)
Control software	PreSens Profiling Studio (compatible with Windows 7, 8, 10 at 32 or 64 bit)

ACCESSORIES



Heavy Stand (HS)

The Heavy Stand (HS) ensures safe mounting and operation of the Automated Micromanipulator. The heavy base plate enables a most stable and vibration-free set-up. The HS comes with two square profile rails of different lengths, so the micromanipulator can be installed in different heights, and is adaptable to different samples. Additionally, two metal rods can be attached to the HS to install further measurement equipment, like VisiSens, cameras or lighting next to the AM. The HS can be balanced with its three adjusting feet and the spirit level integrated in the base plate if required.

- Adjustable micromanipulator height and orientation & can be balanced
- For AM & MM33
- Additional mounting rods for further equipment

TECHNICAL


Specifications

Dimensions (H x W x D)	Base plate: 60 mm x 400 mm x 450 mm Posts (H): 500 mm (long post) / 300 mm (short post)
Weight	14 kg
Mounting	M6 screws
Material	Aluminium & stainless steel (screws & mounting rods)
Features	3 x adjustable feet, 1 x circular level, 2 x mounting rods (□ 12 mm)

SOFTWARE



PreSens Profiling Studio

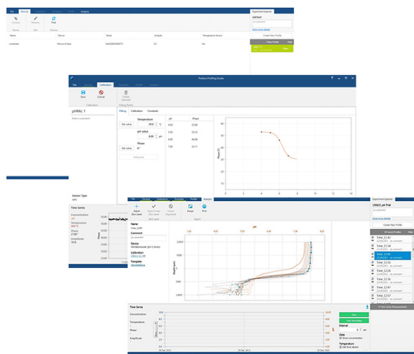

This software enables control of the Automated Micromanipulator and connected oxygen, pH or CO₂ meter. It is database supported and offers multiple features from clear data organization and export, easy creation of profiling templates, to analysis functions.

- Controls AM & connected meter
- Easy creation of profiling templates
- Database supported

TECHNICAL

Minimum System Requirements

Operating system	Microsoft® Windows® 7, 8 and 10 (32 or 64 Bit)		
Processor	2 GHz CPU		
RAM	2 GB		
Hard disk	500 MB free memory		
USB	2x USB 2.0		
Applications	.xlsx and .csv format reader software		
Compatibility	O ₂ meters:	pH meters:	CO ₂ meters:
	Microx 4 & trace OXY-1 ST & Trace, Fibox 4 & trace OXY-1 SMA & Trace EOM-FDM SMA & trace EOM-FDM ST & trace {Microx TX3 & trace}	pH-1 micro pH-1 mini	pCO2 mini



GET IN CONTACT

- [> Request more info](#)
- [> Request a quote](#)
- [> Rent-a-meter](#)

PreSens Precision Sensing GmbH
Am Biopark 11, D-93053 Regensburg
Phone +49 941 942 72 100
Fax +49 941 942 72 111
info@PreSens.de